


# Temescal



## TEMESCAL MODEL 2PT AND 3PT 'POPTOP' SUPERSOURCES


Temescal's patented PopTop e-beam sources offer enhanced convenience, reliability, and throughput in applications ranging from optical and microelectronic production to specialized R & D coating. The key to these performance enhancements is Temescal's pneumatically actuated 'PopTop' crucible cover, which lifts automatically before turret rotation. The net benefit is the virtual elimination of cross-contamination.

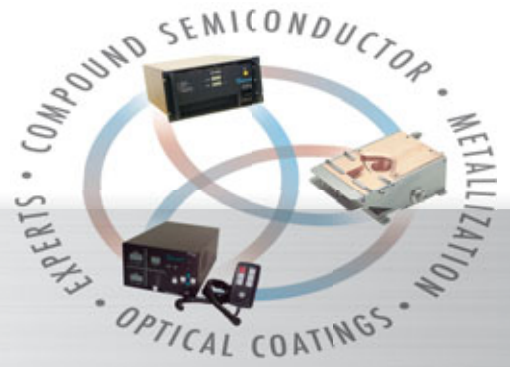

PopTop Crucible Cover  
in Evaporation Position



Crucible Cover Raised  
For Turret Rotation

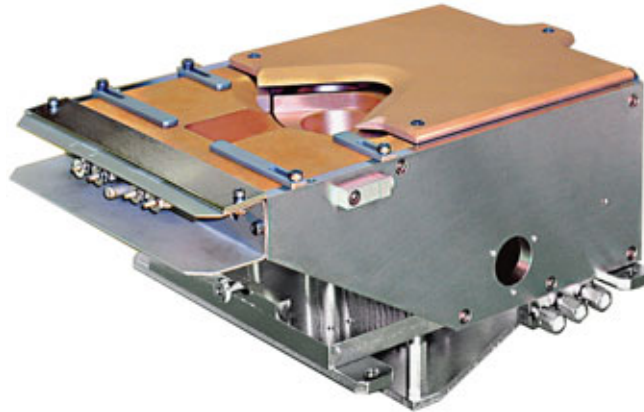

### FEATURES & BENEFITS


- **Movable crucible cover, which rises before the crucible rotates**
- **Pneumatically driven, low-impact cover motion**
- **Lip of cover recessed around exposed pocket**
- **Raised structures on underside of cover interlock with crucible web walls**
- **Virtual elimination of cross-contamination**
- **Minimal deposition on web walls and on cover margins around exposed pocket**
- **Reduced risk of damage to source and turret indexer**
- **Removable/replaceable cover and crucible enable easy source convertibility**
- **Enhanced crucible cooling improves thermal stability during evaporation**
- **Adjustable internal and external pole piece extensions optimize beam spot control, regardless of beam position**
- **Ultra-stable magnetics eliminate the need to regauss magnetic parts following source disassembly**
- **Power rating: 8-10 kW**

## TEMESCAL MODEL 2PT AND 3PT 'POPTOP' SUPERSOURCES


### BENEFITS OF POPTOP CRUCIBLE COVER DESIGN

The diagrams below illustrate how the design of the PopTop cover eliminates cross-contamination and reduces deposition on the lip of the cover around the exposed pocket.

#### Cross-Contamination Path in Conventional Turret Source

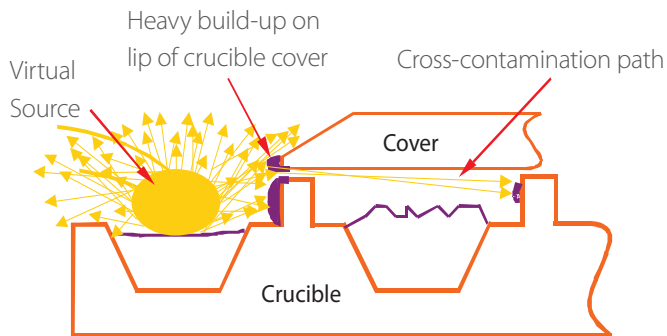


#### Temescal PopTop Source: Interlocking Cover Blocks Cross-Contamination Path

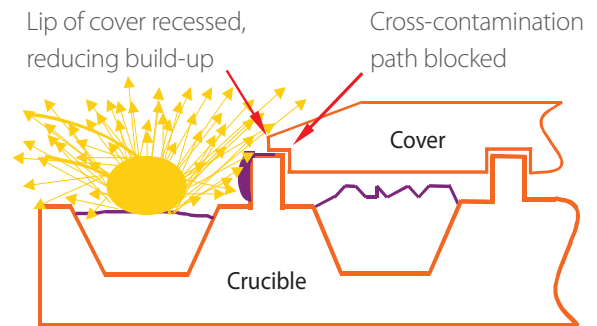

In the photos below, the conventional turret sources show clear evidence of cross-contamination, while the turret in the PopTop source shows none.


#### Conventional Turret Source

Shadows indicating cross-contamination on walls of adjacent pockets

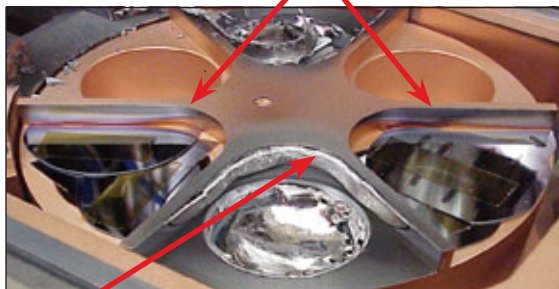


#### Temescal PopTop Source


Pockets from which material was evaporated

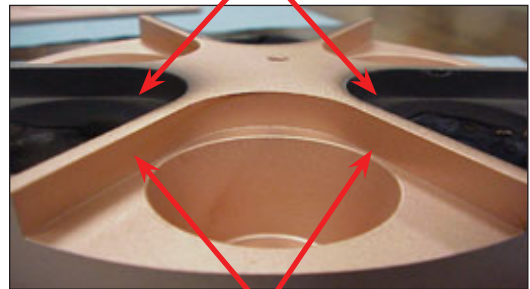

As the following photographs show, the design of the PopTop gun's cover also reduces deposition along the lip of the cover around the exposed pocket.

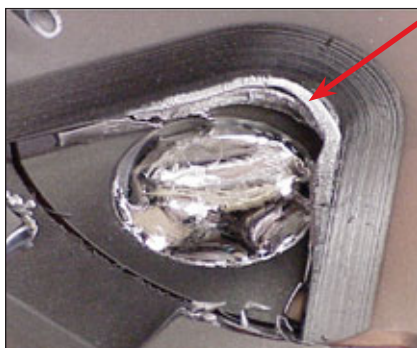

Temescal PopTop source. Build-up on lip of crucible cover greatly reduced. Risk of jamming eliminated.

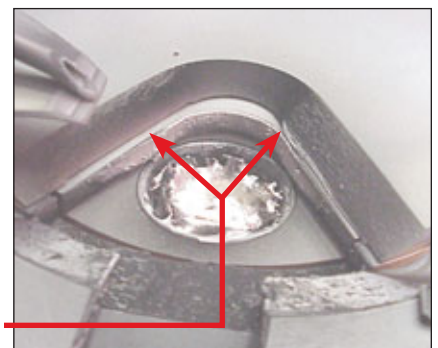


# TEMESCAL MODEL 2PT AND 3PT 'POPTOP' SUPERSOURCES


## SPECIFICATIONS

<b>Weight</b>	Model 2PT: 44.2 lbs. (20 kg) Model 3PT: 50.3 lbs. (22.8 kg)	<b>Deposition rate</b>	See chart below
<b>Rotation torque</b>	10 in. • lbs. (11.5 kg • cm)	<b>Installation power requirements</b>	
<b>Max. bakeout temp.</b>	302° F (150° C)	Filament current	70 A at 12 VAC
<b>Max. power</b>	Model 2PT: 10 kW Model 3PT: 12 kW	Emission current	0–1.5 A at 4–10 kVDC (10 kW max.)
<b>Acceleration voltage</b>	4–10 kV	<b>Cooling water</b>	
<b>Operating pressure</b>		Max. temperature	68° F (20° C)
Maximum	$5 \times 10^{-4}$ torr ( $6.7 \times 10^{-4}$ mbar)	Flow rate	3.0 gpm (0.19 l/sec.)
Minimum	$1 \times 10^{-8}$ torr ( $1.33 \times 10^{-8}$ mbar)	Max. inlet pressure	100 psi (6.89 bar)
<b>Beam deflection</b>	270°	Min. delta pressure	50 psi (3.45 bar)
<b>Beam spot size/shape</b>	From tight oval to diffuse oblong	<b>Feedthroughs (all included in optional feedthrough kits)</b>	
<b>Sweep capability</b>	Longitudinal and lateral		<ul style="list-style-type: none"> <li>• Two HV feedthroughs rated for 12 kV at 70 A</li> <li>• One octal feedthrough rated for 110 V at 3 A per lead</li> <li>• One air/water feedthrough</li> <li>• One rotary-motion feedthrough with 1/4-in. (6.4-mm) dia. shaft</li> </ul>

Model 2PT Dimensions

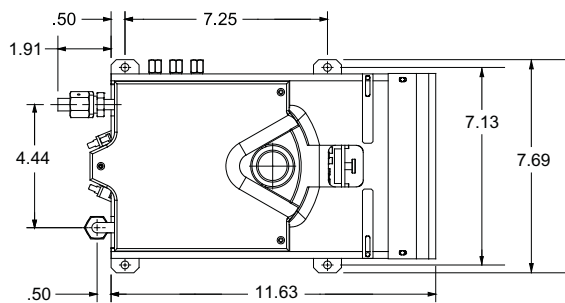


Model 3PT Dimensions

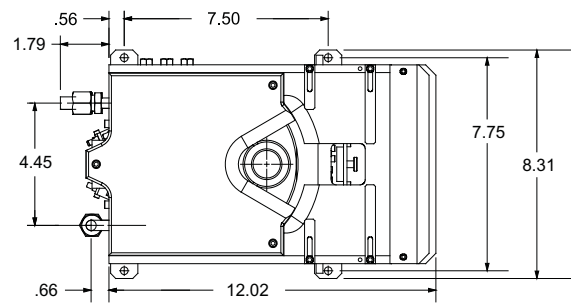

## Representative Deposition Rates

The chart below shows deposition rates obtained using Temescal sources such as the 2PT and the 3PT. Consult Temescal for detailed information about how deposition rate and uniformity are affected by source operating voltage, beam sweep and density, and other fundamental process variables.

Deposition Rates of Various Materials from Temescal Sources\*

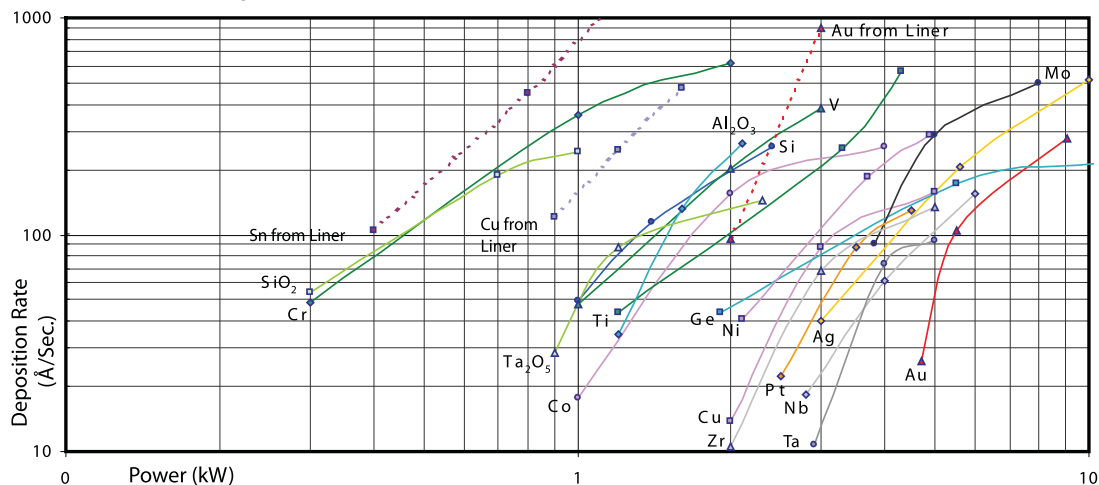

\*25-cc pockets used in all tests. Source-to-substrate distance: 250 mm



# TEMESCAL MODEL 2PT AND 3PT 'POPTOP' SUPERSOURCES

## ORDERING INFORMATION

For each source you wish to order, specify part numbers for a base unit, an emitter, and a spare parts kit. Also specify by part number which crucible(s) and crucible cover(s) you wish to order for each source.

### 2PT PopTop Source

Base Unit/Emitter/Spare Parts Kit	
DESCRIPTION	PART NUMBER
Base unit	0626-4365-0
High-performance emitter	0916-8294-0
Spare parts kit	0916-8300-0

Crucible	
DESCRIPTION	PART NUMBER
4 x 15-cc pockets	0715-8444-0
4 x 25-cc pockets	0715-8454-0
2 x 7-cc + 2 x 15-cc pockets	0715-8464-0
2 x 15-cc + 2 x 25-cc pockets	0715-8494-0
1 x 7-cc + 1 x 15-cc + 2 x 25-cc pockets	0715-8474-0
6 x 7-cc pockets	0715-8514-0
6 x 15-cc pockets	0715-8504-0

Crucible Cover	
DESCRIPTION	PART NUMBER
Cover for 4-pocket crucibles	0627-8144-1
Cover for 6-pocket crucibles	0627-4854-1

### 3PT PopTop Source

Base Unit/Emitter/Spare Parts Kit	
DESCRIPTION	PART NUMBER
Base unit	0627-2805-0
High-performance emitter	0916-8294-0
Spare parts kit	0916-8300-0

Crucible	
DESCRIPTION	PART NUMBER
4 x 60-cc pockets	0626-1214-0
4 x 40-cc pockets	0626-1204-0
6 x 25-cc pockets	0626-1224-0
4 x 25-cc + 2 x 15-cc pockets	0627-5644-0
5 x 25-cc + 1 x 15-cc pockets	0627-4764-0

Crucible Cover	
DESCRIPTION	PART NUMBER
Cover for 4-pocket crucibles	0627-2764-1
Cover for 6-pocket crucibles	0627-2694-1

Model 2PT and 3PT sources are covered by one or more of the following U.S. patents: 3,177,535; 3,483,417; 3,710,072

### Optional Accessories

DESCRIPTION	PART NUMBER
PopTop air installation kit	0733-0524-0
PopTop electrical installation kit	0620-9720-0
PopTop feedthrough kit for 2PT gun	0503-1201-7
PopTop feedthrough kit for 3PT gun	0503-1201-8
Feedthrough kit with flex lines for air/water feedthrough	0503-1201-6
SuperSweep64 beam sweep controller	0611-8570-0
TRC-3460 turret source indexer	0040-9380-3

# Temescal

[www.Temescal.net](http://www.Temescal.net)

#### AUSTRALIA

**AVT Services**  
Unit 16/35 Foundry Road  
Seven Hills, 2147, Australia  
1 800 559 988

#### BRAZIL

**Edwards Vacuum, Brazil**  
Rua Bernado Wrona 222  
02710 Sao Paulo-SP  
+55 11 3952 5000  
+55 11 3965 2766

#### CANADA

**Linde Canada Ltd.**  
5860 Chedworth Way  
Mississauga L5R 0A2  
Ontario  
800 387 4076  
905 501 1225

#### CHINA

**Micro-Power Semiconductor Ltd**  
Room 2101  
Xinghuo Science Building  
No.2 Fufeng Road, Fengtai  
District, Beijing 100070, PRC  
+86 10 88 893350/51 ext 8010  
+86 10 88 893310

#### FRANCE, SPAIN & PORTUGAL

**MTB Solutions**  
2 rue Pierre Latecoere  
ZAC de Segla  
31600 Seysses, France  
+33 5 62 87 38 20  
+33 5 62 87 38 21

#### GERMANY

**Vactec GmbH**  
Rubinsteinstrasse 47  
D-81245 Munchen  
+49 89 864 4305  
+49 89 864 4306  
+49 89 864 4809

#### INDIA

**Vacuum Techniques, Pvt. Ltd.**  
No. 36A, AGS Layout, MSR  
Nagar, Bangalore, 560 054  
+91 80 336 3482  
+91 80 360 1639

#### ISRAEL

**Edwards Vacuum, Inc. Israel**  
5 Habarzel Blvd.  
Industrial Zone  
P O Box 8621  
Qiryat Gat 82000  
+972 7 681 0633  
+972 7 681 0640

#### ITALY

Gambetti Kenologia  
Via a. Volta N. 27  
20082 Binasco (MI)  
+39 02 900 93082  
+39 02 905 2778

#### KOREA

**Zeus Co, Ltd**  
729 Jubuk-Ri,  
Yangji-Myeon, Cheoin-Gu  
Yongin-Si, Kyeonggi-Do  
449-882 Korea  
+82 31 322 6900 x280  
+82 31 322 5544 5

#### NETHERLANDS & BELGIUM

**A. De Jong**  
Toermalijnring 1000  
3316 LC Dordrecht  
Netherlands  
+31 78 655 20 00  
+31 78 655 20 10

#### RUSSIAN FEDERATION

**Intech Vacuum**  
33/1 Engelsa Avenue  
408 Office  
St. Petersburg, 194156  
Russian Fed.  
+7 812 336 38 96  
+7 812 326 38 95

#### SINGAPORE

**Ellipsiz, Ltd**  
29 Woodlands Ind. Park E1  
#04-01/06 NorthTech Bldg.  
Singapore 757716  
(65) 6311 8500  
(65) 6269 2628

#### TAIWAN

**Junsun Tech Co., Ltd**  
7F, 659, Chung-Cheng Rd.  
Hsin-Chuang City  
Taipei County 242  
Taiwan ROC  
+886 2 29081350 x 11  
+886 2 29081305

#### UK & IRELAND

**Scotech**  
Netherton Road  
Lanqank, Renfrewshire  
Scotland PA14 6YG  
+44 1 475 540 689  
+44 1 475 540 206

#### UNITED STATES

**Temescal Headquarters**  
4569-C Las Positas Road  
Livermore, CA 94551  
800 522 1215 (U.S.)  
925 449 4096

© 2010 Ferrotec (USA) Corporation. All rights reserved.  
Ferrofluidic is a registered trademark of Ferrotec Corporation.

# Ferrotec