



1579

DIGITAL MASS FLOW CONTROLLER FOR HIGH FLOW RATES

The 1579 is a digital Mass Flow Controller of the latest generation that was developed for many different applications in research and industry. The 1579 is based on proven MKS technology that offers fast controller settling time along with high accuracy over the entire control range. This makes it possible to integrate the 1579 into processes that require the minimum time for stabilization of the process conditions as well as excellent reproducibility.

Because of its compact design, the 1579 may be used in space saving gas panel systems. The electrical connections are made with D-Sub connectors for both Analog and Profibus versions, in conformance with all CE regulations. While MFC applications in research and development typically use local analog power supply/readouts, many industrial applications are moving to digital bus-compatible communications and power distribution. The 1579 meets both of these requirements.

Features & Benefits


- Full Scale Flow Ranges from 50 slm to 300 slm
- Dual Voltage Power Input; +24 VDC or ± 15 VDC
- Controller Settling Time less than 1 second
- Analog or Analog and Profibus DP Communications
- Diagnostics/Setup Kit available for Analog Communications version
- MultiGas/MultiRange Capability for up to 15 gases
- 1% FS accuracy with % reading optional
- Plug compatible with earlier MKS MFCs
- Compact Design



In 1997, MKS Instruments was the first manufacturer to develop a Profibus standard for Mass Flow Controllers with the 1179A. The 1579 follows this standard with respect to both the interface and the communications. Further advances in digital electronics and flow design have allowed the development of a coordinated product line using digital processing with both analog and digital interfaces ranging from a minimum of flow rate of 0.2 sccm in the 1179B to a maximum of 300 slm in the 1579.


Both analog and Profibus versions incorporate a flexible power system that allows either ± 15 VDC or +24 VDC power supplies to be used. This allows the user to choose the most effective method of powering the unit for his application. Additionally, the analog variant of the 1579 is equipped with a digital interface that provides access to setup functions and diagnostics through the use of proprietary software.

Continuing development of both electronics and flow design have enabled MKS Instruments to develop and produce a compact, robust device with excellent accuracy and settling time.

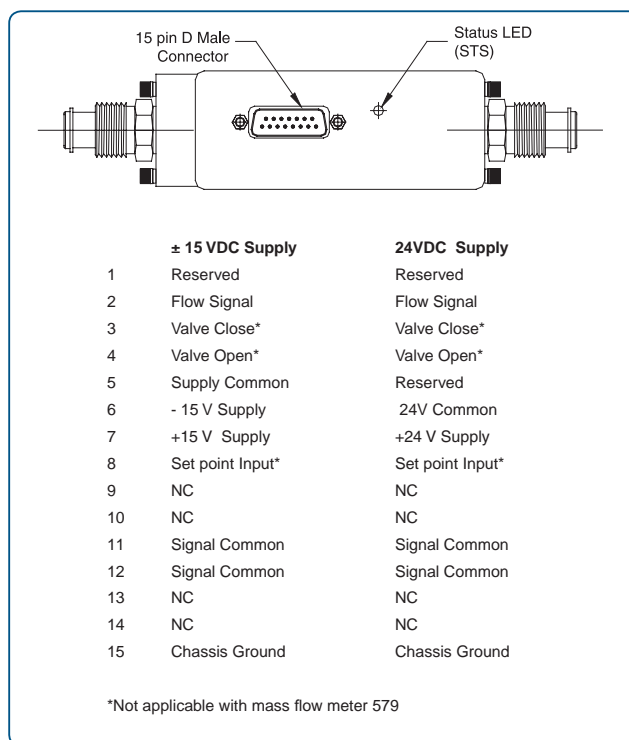


Pinout Analog —

Connector side and pinout of 1579 analog version

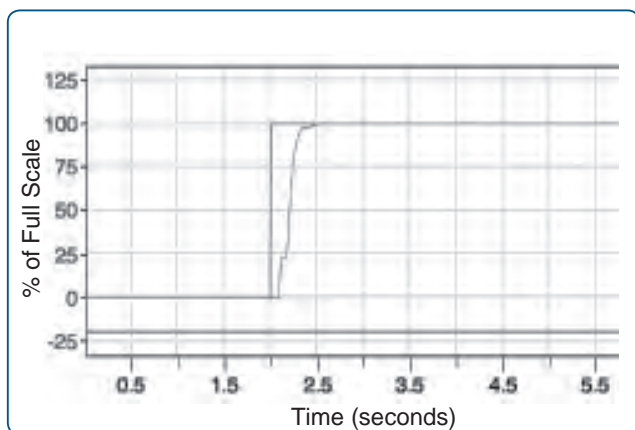

Controller Settling Time —

The above graph shows the settling time of the 1579

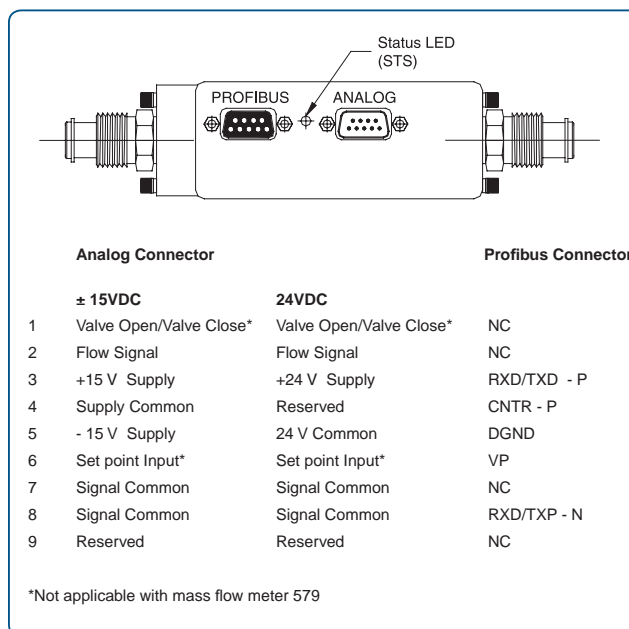

Pinout Profibus —

Connector side and pinout of 1579 Profibus version



Specifications

Flow Range Full Scale (N ₂ in slm)	50, 100, 200, 300 slm
Max. Inlet Pressure	100 psig
Normal Operating Pressure Differential (with atmospheric pressure at the MFC outlet)	
50, 100 slm	17 to 40 psid
200 slm	27 to 40 psid
300 slm	40 to 49 psid
Control Range	2 to 100% of F.S.
Accuracy (including non-linearity, hysteresis and non-repeatability; referenced to 760 mmHg and 0°C)	±1% of F.S.
Repeatability	± 0.2% of F.S.
Resolution	16 Bit
Temperature Coefficients	
Zero	< 0.05% of F.S. /°C
Span	< 0.10% of F.S. /°C
Warm-Up Time	< 30 min
Controller Settling Time	< 1 s typical
Pressure Coefficient	± 0.02% of Rdg/psi
Normal Operating Temperature Range	15°C to 40°C (59°F to 104°F)
Input Voltage Required	20.5 to 30 VDC
Max. Current	300 mA
Set Point Command Signal	0 to 5 VDC from < 20 kOhm
Output Signal	0 to 5 VDC into > 10 kOhm
Connector Types	
Analog	15-pin Type "D" male
Profibus	2 x 9-pin Type "D" male (analog) and female (Profibus)
Wetted Materials	
Standard	316L S.S.T, Nickel, Viton®
Optional (Seals and valve seat)	Buna-N, Neoprene®, Kalrez®
Leak Integrity	
External	< 1 x 10 ⁻⁹ scc/sec He
Through closed valve	< 0.1% of F.S.
Fittings (compatible with)	
Standard	8 VCR® male
Optional	8 VCO® male, DN 16 KF 1/2" Swagelok®, 12 mm Swagelok® 4 VCR® male (for 50 slm only)
Compliance	CE



Ordering Information

SEMI Gas Codes

SEMI Gas Code	Name	Symbol	Maximum FS, slm	Flow Rate
001	Helium	He	300	32L
004	Argon	Ar	300	32L
007	Hydrogen	H ₂	300	32L
008	Air	--	300	32L
013	Nitrogen	N ₂	300	32L
015	Oxygen	O ₂	300	32L
019	Chlorine	Cl ₂	200	22L
025	Carbon Dioxide	CO ₂	200	22L
028	Methane	CH ₄	200	22L
029	Ammonia	NH ₃	200	22L
039	Silane	SiH ₄	100	12L
042	Acetylene	C ₂ H ₂	100	12L
110	Sulfur Hexafluoride	SF ₆	50	51L

Ordering Code Example: 1579A01332LR1BVXX

Code	Configuration
1579A 579A Mass Flow Meter	1579A

Gas To Be Calibrated For: (SEMI Gas Code) See table for additional options

Helium	001	013
Argon	004	
Hydrogen	007	
Nitrogen	013	
Oxygen	015	

Full Scale Range of Calibrated Gas*

50 slm	51L	32L
100 slm	12L	
200 slm	22L	
300 slm	32L	

Fittings (compatible with)

Swagelok® 8 VCR® male	R	R
Swagelok 8 VCO® male	G	
½" Swagelok	S	
12mm Swagelok	M	
DN 16KF	D	
Swagelok 4 VCR (for variant 51L only)	V	

Valve

Normally closed	1	1
For 579A (MFM)	3	

Connector

Analog 15-pin Type D	B	B
Digital Profibus® DP	4	

Seal Materials

Buna-N	B	V
Kalrez®	K	
Neoprene®	N	
Viton®	V	

Firmware (Profibus only)

Unless otherwise specified, MKS will ship firmware revision current to date of order	XX	XX
--	----	----


Optional Accessories

Diagnostics Adapter Kit (to use the proprietary Diagnostics Port)	DMC-Support
Mounting Plate	Y-5150166
4-Channel Power Supply and Readout Unit with RS-232	647C4R0N
8-Channel Power Supply and Readout Unit with RS-232	647C8R0N
1-Channel Power Supply and Readout Unit with RS-232	PR4000S
2-Channel Power Supply and Readout Unit with RS-232	PR4000F

Cabling for 1579A:

CB147-12-10 to connect 1579 9-pin Type "D" to PR4000, 186, 246, 167, 647
 CB259-5-3M to connect 1579 15-pin Type "D" to 246, PR4000, 186, 167, 647

* Max. 300 slm N₂ equivalent

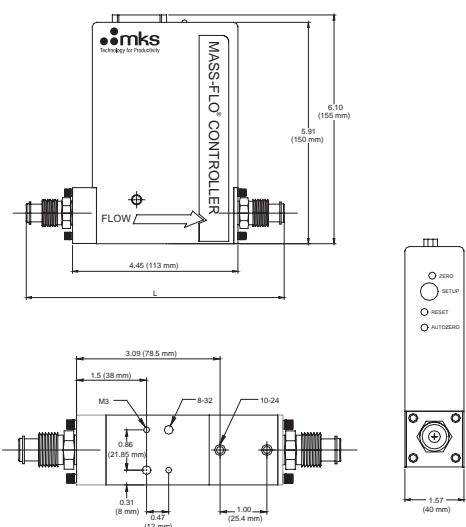

Dimension - L	inches	mm
Swagelok 8 VCR	7.20±0.06	183±1.52
12 mm Swagelok	6.77±0.06	172±1.52
½" Swagelok	6.77±0.06	172±1.52
Swagelok 4 VCR	6.87±0.06	174.5±1.52
Swagelok 8 VCO	6.85±0.06	174±1.52
DN16KF	6.37±0.06	162±1.52

Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



1579 - 1/18
 © 2006-2018 MKS Instruments, Inc.
 All rights reserved.

MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
 Andover, MA 01810
 Tel: 978.645.5500
 Tel: 800.227.8766 (in U.S.A.)
 Web: www.mksinst.com

MKS Instruments, Inc. Flow Solutions

Six Shattuck Road
 Andover, MA 01810
 Tel: 978.975.2350

MKS products provided subject to the US Export Regulations. Diversion or transfer contrary to US law is prohibited. Specifications are subject to change without notice. mksinst™ is a trademark of MKS Instruments, Inc., Andover, MA. Viton®, Neoprene® and Kalrez® are registered trademarks of E.I. DuPont Co., Inc., Wilmington, DE. Swagelok®, VCR® and VCO® are registered trademarks of Swagelok Marketing Co., Solon, OH.