



Flow

Solutions

WWW.MKSINST.COM

GV50A

ELASTOMER SEALED, DIGITAL MASS FLOW CONTROLLER

The GV50A is a general purpose, elastomer sealed MFC well suited for a wide variety of applications requiring flow control capability from 5 sccm to 50 slm FS, N₂ equivalent. The GV50A incorporates the latest in digital flow control electronics along with a well proven, patented thermal sensor and mechanical design.

The GV50A digitally controlled MFC is available with either analog or digital I/O. The digital control electronics utilize the latest in MKS control algorithms providing fast and repeatable response to set point throughout the device control range. Typical response times are on the order of 500 milliseconds. Included is a digital calibration that yields 1% of set point accuracy on the calibration gas. The GV50A's analog and digital I/O can easily be used to replace those same I/O types of the 2179A MFCs.

The GV50A incorporates a normally closed, diaphragm type positive shut-off valve. This shut-off valve provides closure to 4x10E⁻⁰⁹ scc/sec of Helium. The design of the GV50A incorporates a minimal use of elastomers. There is only one external elastomer seal and elastomer valve plug. Otherwise, all wetted surfaces are of metal. The GV50A comes standard with Viton® seals along with options for Buna or Neoprene® allowing for the device's use with gases requiring one of these alternatives.

Features & Benefits

- Patented thermal sensor design provides exceptional zero stability
- Percent of set point accuracy (calibration gas) enables precise process control
- Embedded user interface provides the ability to
 - Easily change device range and user gas reducing inventory requirements
 - Monitor device functionality and collect performance data in-situ
- Wide choice of digital (EtherCAT®, DeviceNet™, Profibus®, PROFINET® and RS485) or analog (0 to 5 VDC or 4 to 20 mA) I/O
- Integral, normally closed diaphragm type shut-off valve provides positive shut-off to 4x10E⁻⁰⁹ scc/sec He



Performance

Full Scale Flow Ranges (<i>N₂ equivalent</i>)	5 sccm to 50000 sccm
Maximum Inlet Pressure	150 psig (cannot exceed pressure differential requirement across MFC)
Normal Operating Pressure Differential (<i>N₂ F.S.</i>) (<i>with atmospheric pressure at the MFC outlet</i>)	5 to 5000 sccm; 10 to 40 psid 10000 to 20000 sccm; 15 to 40 psid 30000 to 50000 sccm; 25 to 40 psid
Proof Pressure	1000 psig
Burst Pressure	1500 psig
Control Range	2% to 100% of F.S.
Typical Accuracy (<i>with N₂ calibration gas</i>)	± 1% of set point for 20 to 100% F.S. ± 0.2% of F.S. for 2 to 20% F.S.
Repeatability	± 0.3% of Reading
Resolution	0.1% of Full Scale
Temperature Coefficients	
Zero	< 0.05% of F.S./°C
Span	< 0.08% of Rdg./°C
Inlet Pressure Coefficient	< 0.02% of Rdg./psi
Typical Controller Settling Time (<i>per SEMI Guideline E-17-0600</i>)	< 750 msec., typical above 5% F.S.
Warm-up Time (<i>to within 0.2% of F.S. of steady state performance</i>)	< 30 min
Operating Temperature Range (Ambient)	10°C to 50°C
Storage Humidity	0 to 95% relative humidity, non-condensing
Storage Temperature	-20° to 80°C (-4° to 149° F)

Mechanical

Fittings (<i>compatible with</i>)	Swagelok® 4 VCR® male, Swagelok 4 VCO® male, 1/4" Swagelok compression seal, Swagelok 8 VCR male, 1/8" Swagelok, 1/2" Swagelok, 6 mm Swagelok, 8 mm Swagelok, KF-16, 3/8" Swagelok, 8 VCO Male, 10mm Swagelok, 12mm Swagelok, 2 VCR male
Leak Integrity	
External (scc/sec He)	< 1 x 10 ⁻⁰⁹
Through closed control valve	Up to 10K valve <0.1% of FS at 40 psig to atmosphere 20K - 50K valve <1.0% of FS at 40 psig to atmosphere (To assure no flow-through, a separate positive shut-off valve is required.)
Through shut-off valve (scc/sec/He)	< 4 x 10 ⁻⁰⁹
Wetted Materials	
Standard	316L S.S. VAR (equivalent to 316 S.S. SCQ for semiconductor quality), 316 S.S., Elgiloy®, Nickel, Kel-F
Seals and Valve Seat	Viton, Buna-N, EPDM, Kalrez or Neoprene
Pneumatic Valve Supply Pressure	60 - 120 psig
Surface Finish	16µ inch average Ra
Weight	Less than 3 lbs (1.4kg)

Electrical Analog I/O

Input Power Required	+15 to +24 VDC @ (< 4 watts)
Flow Input/Output Signal	
Voltage (0 to 5 VDC)	15 pin Type "D" male, 9 pin Type "D" male
Current (4 to 20 mA)	15 pin Type "D" male
Compliance	CE




Specifications (cont'd)

Digital I/O

Digital I/O	DeviceNet™	RS485	Profibus®	EtherCAT®	PROFINET®
Input Power Required	+11 to +25 VDC per (< 4 watts)	+15 to +24 VDC (< 4 watts)	+15 to +24 VDC (< 4 watts)	+24 VDC (< 5 watts)	+24 VDC (< 5 watts)
Connector	5 pin micro connector (power and comm.)	9 pin Type D male (power and comm.)	9 pin Type D male (power) 9 pin Type D female (comm.)	2 x RJ-45 (comm.) male, M8 male, 5 pin (power)	2 x RJ-45 (comm.) male, M8 male, 5 pin (power)
Data Rate Switch/Selection	4 positions: 125, 250, 500K (Default), (programmable over network)	No switch Set data rate via RS485	No switch Set data rate via Profibus	No switch	No switch
Comm. Rate(s)	125 Kbps 250 Kbps 500 Kbps	9.6 Kbps 19.2 Kbps 38.4 Kbps	9.6 Kbps to 12 Mbps	100 Mbps	100 Mbps
MAC ID Switches/Addresses	2 switches, 10 positions; 0,0 to 6,3 1 to 254	Set address over RS485 Station Addresses 0,0 to 9,9	2 switches, 10 positions	3 switches, 16 positions	N/A
Network Size	Up to 64 nodes	Up to 32 nodes	Up to 99 nodes	Up to 4095 nodes	N/A
Visual Indicators	LED Network (green/red) LED Module (green/red)	LED Comm (yellow) LED Error (red)	LED Comm (green/red) LED Error (green/red)	LED Power (green) LED Run (green) LED Error (red) LED Comm (green)	LED Maint (amber) LED BUS Fault (red) LED Ready (green) LED Sys Fault (red)
Compliance	CE	CE	CE	CE	CE

Dimensional Drawing

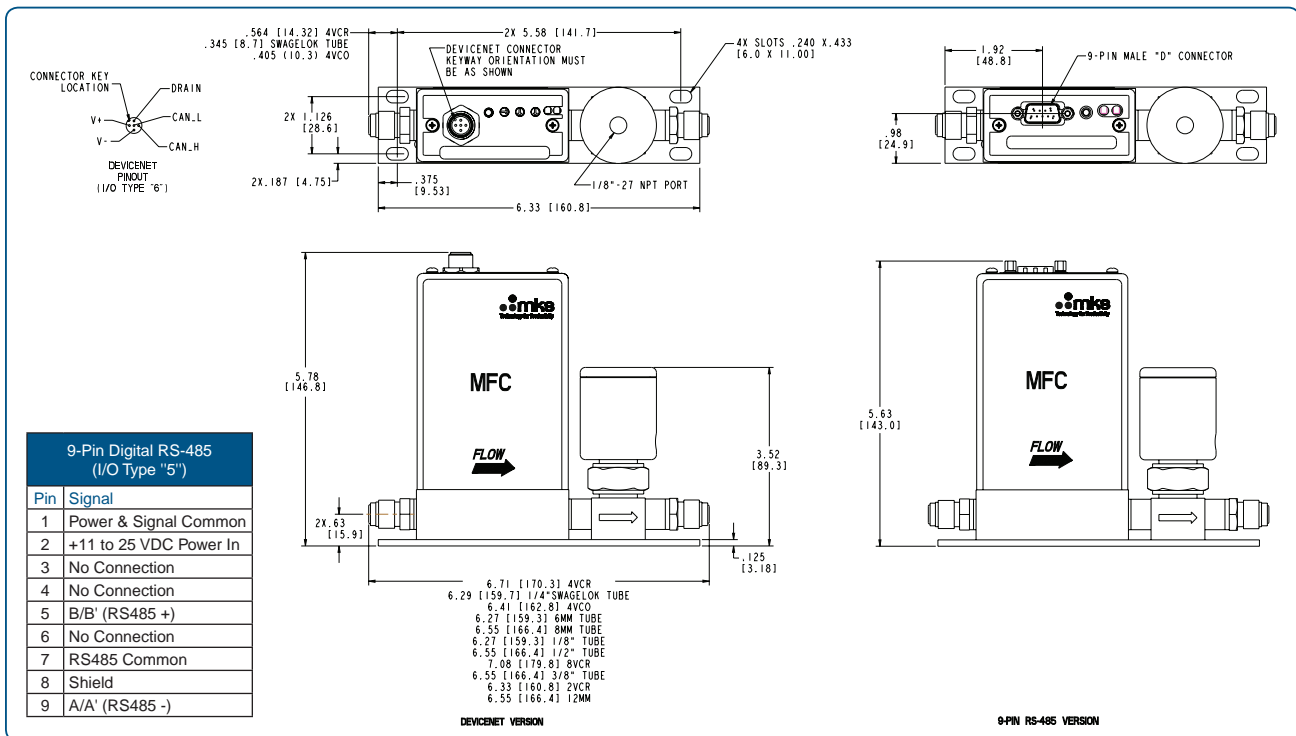

Dimensional Drawing – DeviceNet™ and RS485 with VCR Fittings

(See manual for additional I/O and fitting types)

Note: Unless specified, dimensions are nominal values in inches (mm referenced).



Ordering Information

Ordering Code Example: GV50A013502R6V020	Code	Configuration	
MFC Mass Flow Controller GV50A	GV50A	GV50A	
Gas (Per Semi Standard E52-0703)			
For example:			
013 = Nitrogen = N ₂	013	013	
029 = Ammonia = NH ₃	029		
110 = Sulfur Hexafluoride = SF ₆	110		
Flow Range Full Scale*			
5 sccm	500	502	
10 sccm	101		
20 sccm	201		
50 sccm	501		
100 sccm	102		
200 sccm	202		
500 sccm	502		
1000 sccm	103		
2000 sccm	203		
5000 sccm	503		
10000 sccm	104		
20000 sccm	204		
30000 sccm	304		
50000 sccm	504		
Fittings (compatible with)			
6 mm Swagelok	M	R	
8 mm Swagelok	E		
10mm Swagelok	P		
12mm Swagelok	F		
1/8" Swagelok (for 1000 sccm N ₂ equivalent or below)	A		
1/4" Swagelok	S		
1/2" Swagelok	K		
3/8" Swagelok	J		
Swagelok 4 VCO male	G		
Swagelok 4 VCR male	R		
Swagelok 8 VCR male	T		
Swagelok 8 VCO Male	D		
Swagelok 2 VCR Male (for 1000 sccm N ₂ equivalent or below)	B		
KF-16	U		
Connector			
EtherCAT®	8		6
DeviceNet™	6		
RS485 (uses 9 pin connector)	5		
Profibus® (1179 Compatible)	4(3)		
PROFINET®	9		
Analog 0 to 5 VDC (9 pin D connector)	A		
Analog 0 to 5 VDC (9 Pin D connector), Tied Grounds	L		
Analog 0 to 5 VDC (15 pin D connector)	B		
Analog 0 to 5 VDC (15 pin D connector), Tied Grounds	M		
Analog 4 to 20 mA (15 pin D connector)	H		
Analog 0 to 5 VDC (15 Pin D Connector), Brooks	E		
Analog 0 to 5 VDC (15 Pin D Connector), Celerity	U		
Seal Materials**			
Viton	V	V	
Buna-N	B		
Neoprene	N		
EPDM	E		
Kalrez	K		
Valve/Device Type			
Normally Closed	0	0	
Firmware (unless otherwise specified)			
MKS will ship firmware revision current to date.	20	20	

* The Full Scale flow rate is designated by a 3 digit number. The first two digits represent the significant digits of the Full Scale flow rate separated by a decimal point. The third digit is the exponent of the power of ten. Example flow rate code: 254 is 2.5 x 10⁴ or 25000 sccm 153 is 1.5 x 10³ or 1500 sccm 601 is 6.0 x 10¹ or 60 sccm

** The user should consult with their gas supplier on the appropriate elastomer which is compatible with the selected gas.



MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc. Flow Solutions

Six Shattuck Road
Andover, MA 01810
Tel: 978.975.2350

GV50A - 1/18
© 2012-2018 MKS Instruments, Inc.
All rights reserved.

MKS products provided subject to the US Export Regulations. Diversion or transfer contrary to US law is prohibited. Specifications are subject to change without notice. mksinst™ is a trademark of MKS Instruments, Inc., Andover, MA. Swagelok® and VCR® are registered trademarks of Swagelok Marketing Co., Solon, OH. Viton®, Neoprene®, and Kalrez® are registered trademarks of E.I. DuPont, Wilmington, DE. Elgiloy® is a registered trademark of Elgiloy Limited Partnership, Elgin, IL. DeviceNet™ is a trademark of the Open DeviceNet Vendor Association, Coral Springs, FL. Profibus® and PROFINET® are registered trademarks of Profibus International, Karlsruhe, Germany. EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.